

Multi four gas detector

Explosion-proof
Portable 4 in 1 gas detector

- 2.8-inch color large screen
- Temperature & humidity display
- Sound light vibration display alarm
- Rechargeable (5000mAh battery)

HOT SALE

The portable Multi gas detector adopts 2.8-inch TFT color screen display, which can detect 4 kinds of gases at the same time. It supports the detection of temperature and humidity. The operation interface is beautiful and elegant, it supports display in both Chinese and English. When the concentration exceeds the preset alarm point, the instrument will make sound, light and vibration alarm. With real-time data storage function, and USB communication interface, can connect with the computer to read settings, derive records, Use PC material, appearance design conform to ergonomic design

o

Product feature:

- ★ 2.8 inch TFT color screen, 240*320 resolution, support Chinese or English display
- ★ according to customer requirements, up to 4 kinds of gases can be detected at the same time, support CO2 and VOC sensors.
- ★ can detect the temperature and humidity in the working environment
- ★ four buttons, compact size, easy to operate and carry
- ★ with real-time clock, can be set
- ★ LCD real-time display for gas concentration and alarm status
- ★ Large capacity lithium battery charging, ensure the instrument works continuously for a long time
- ★ Vibration, audible and visual three alarm mode
- ★ strong high-grade crocodile clip, easy to carry
- ★ The shell is made of high strength special engineering plastics, strong and durable, beautiful and comfortable
- ★ with data storage function, can store 3,000 alarm records and 990,000 real-time records, can view records on the instrument, but also through the data line connection computer export data.

Basic parameters:

Detection gas: oxygen, carbon dioxide, combustible gas and toxic gas, temperature and humidity, can be customized gas combination.

Detection principle: electrochemical, infrared, catalytic combustion, PID.

Maximum allowable error: $\leq \pm 3\%$ f.s.

Response time: $T_{90} \leq 30s$ (except for special gas)

Alarm mode: sound-light, vibration

Working environment: temperature: $-20 \sim 50^{\circ}C$, humidity: $10 \sim 95\%rh$ (no condensation)

Battery capacity: 5000mAh

Charging voltage: DC5V

Communication interface: Micro USB

Data storage: 990,000 real-time records and over 3,000 alarm records

Overall dimensions: $75 * 170 * 47$ (mm) as shown in figure 1.

Weight: 293 g

Standard equipped: manual, certificate, USB charger, packing box, back clamp, instrument, calibration use gas cover.

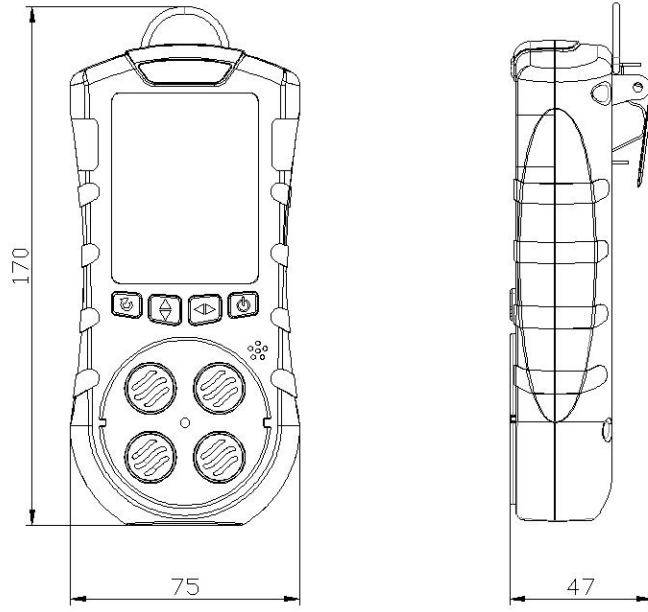


图 1 外型尺寸图